

◆ RAD Cabinet Ovens

Proven reliability in demanding applications, such as curing, drying and aging

Despatch RA cabinet ovens feature horizontal recirculating airflow to ensure exceptional temperature uniformity throughout the oven. A high-volume fan circulates air through perforated, stainless steel walls to create a constant horizontal airflow across all sections of the oven. The result is proven reliability in demanding production and laboratory applications, such as curing, drying, stress relieving, aging, and other process-critical applications.

This oven is equipped with the Protocol 3™ microprocessor-based temperature and hi-limit controller with large LCD display and real time clock for auto start capability. The LCD display shows temperature readings along with clear, detailed information on oven status. The data-logging functionality enables reporting and analyzing and data files can be exported via the controller's USB port. Modbus RS485 communications are included for easy data access.



Technical Sales Offices:	
San Diego	(619) 540-2200
Los Angeles	(818) 416-3487
SF Bay Area	(510) 606-9090
Seattle	(425) 321-2757
Canada	(778) 650-5236
NW Main Office	(971) 244-8200
info@W5engineering.com	
1-866-400-1300	

FEATURES AT A GLANCE

- ◆ Temperatures up to 343°C (650°F)
(Models available with temperatures up to 538°C (1000°F))
- ◆ Three models from 4.2 to 35 cu. ft.
(119 to 991 liters)
- ◆ Horizontal recirculating airflow
- ◆ Protocol 3™ control with large LCD display, integrated data logging capabilities and USB port for simple oven set-up and data export.
- ◆ 304 stainless steel interior
- ◆ 5-year heater warranty
- ◆ End of cycle and high-limit indicators
- ◆ Audible and visual high-limit alarm
- ◆ RS485 Modbus communication PC interface
- ◆ 1" process port for test wires and disconnect switch
- ◆ UL and C-UL listed open industrial control panel

OPTIONS:


- ◆ Despatch unique adjustable louvers
- ◆ Door switch
- ◆ Reinforced floor
- ◆ Chart recorder
- ◆ CE compliance

RAD**1-42 Bench****2-19****2-35****PHYSICAL SPECIFICATIONS**

Chamber size (width x depth x height)	20 x 18 x 20 in. 51 x 46 x 51 cm	36.5 x 25 x 37 in. 93 x 64 x 94 cm	47.5 x 30 x 42 in. 121 x 76 x 107 cm
Capacity in cubic feet (liters)	4.2 (119)	19.5 (552)	35 (991)
Overall size (width x depth x height)	46 x 31.5 x 37.5 in. 119 x 80 x 95 cm	79.5 x 42 x 74 in. 203 x 107 x 188 cm	92 x 47 x 79 in. 234 x 119 x 201 cm
Electrical: 60 hertz - three phase *1-42 bench runs on 50/60 hertz - single phase	208 volts	*33.7 amps/6 kW	37.7 amps/12 kW
	240 volts	*30 amps/6 kW	33.2 amps/12 kW
	480 volts	NA	16.6 amps/12 kW
Number of shelves provided	2	2	2
Maximum number of shelves	8 on 2 in. centers	12 on 3 in. centers	14 on 3 in. centers
Exhaust outlet diameter	2.5 in. (6.4 cm)	7 in. (17.8 cm)	7 in. (17.8 cm)
Doors	1	2	2
Approximate net weight	350 lbs (159 kg)	1450 lbs (658 kg)	1700 lbs (771 kg)
Approximate shipping weight	480 lbs (218 kg)	1625 lbs (737 kg)	1875 lbs (850 kg)
Insulation thickness	4 in. (10.2 cm)	6 in. (12.7 cm)	6 in. (12.7 cm)

FUNCTIONAL SPECIFICATIONS

Time to temp with no load (40°C to 177°C)	10 minutes	17 minutes	16 minutes
Time to temp with no load (40°C to 260°C)	20 minutes	32 minutes	28 minutes
Time to temp with no load (40°C to 343°C)	38 minutes	50 minutes	50 minutes
Temperature uniformity	+/- 2.3°C at 177°C +/- 3.4°C at 260°C +/- 4.2°C at 343°C	+/- 2°C at 177°C +/- 2.8°C at 260°C +/- 3.7°C at 343°C	+/- 2°C at 177°C +/- 2.8°C at 260°C +/- 3.7°C at 343°C
Minimum operating temp	40°C (104°F)	40°C (104°F)	40°C (104°F)
Maximum operating temp	343°C (650°F)	343°C (650°F)	343°C (650°F)
Control stability	+/- 0.5°C on all models		
Repeatability	+/- 0.5°C	+/- 0.5°C	+/- 0.5°C
Maximum load capacity	91 kg (200 lbs.)	386 kg (850 lbs.)	567 kg (1250 lbs.)
Maximum shelf capacity	13.6 kg (30 lbs.)	45.4 kg (100 lbs.)	45.4 kg (100 lbs.)
Exhaust capacity	Adj. to 12 CFM (5.6 l/s)	Adj. to 27 CFM (12.7 l/s)	Adj. to 110 CFM (51.9 l/s)
Recirculating fan	1/2 HP 425 CFM (200 l/s)	1 HP 1150 CFM (543 l/s)	2 HP 1550 CFM (731 l/s)

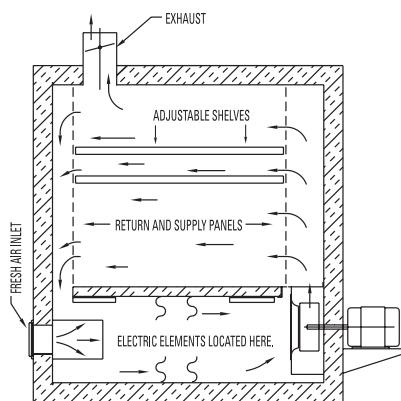

RAD front view cross section showing airflow pattern.

Notes: Uniformity figures are based on a nine-point test conducted in an empty oven after stabilization period. Uniformity can vary slightly depending on unit and operating conditions. Minimum operating temperature and cooling times are based on 20°C ambient temperature measured at the fresh air inlet with the fresh air and exhaust dampers fully open. Specifications are subject to change without notice. If the existing specifications differ from yours, ask about our customizing capabilities.

RAD models are not to be used with flammable solvents, materials or containers. If your process involves flammable solvents please inquire about our RFD models.

*50 hertz electrical is available on all models



RAD1-42 benchtop oven

SERVICE AND TECHNICAL SUPPORT

service parts: 1-800-473-7373

international service/main: 1-952-469-8230

service fax: 1-952-469-8193

service@despatch.com

parts@despatch.com

GLOBAL HEADQUARTERS

main phone: 1-800-726-0110

international/main: 1-952-469-5424

sales: 1-800-726-0550

international/sales: 1-952-469-8240

sales@despatch.com

www.despatch.com

8860 207th Street West
Minneapolis, MN 55044 USA

Despatch
INDUSTRIES